GOTO : Pulsation Dampner
Plastic Poly-Prop. Housing
Bladder Gas Bag LP

Pulsation Dampner Plastic PVC Housing, Bladder Gas Bag, Low Pressure

PULSEGUARD "PIPEGUARD Plas PVC"

Licensed M. Packer Since 1965

Since 1965

"Pig Plas-PVC" Series Pulsation Dampner, &options.
PVC Plastic wetted parts + EP, Nitrile, Hypalon, Fluorel etc gas bags.

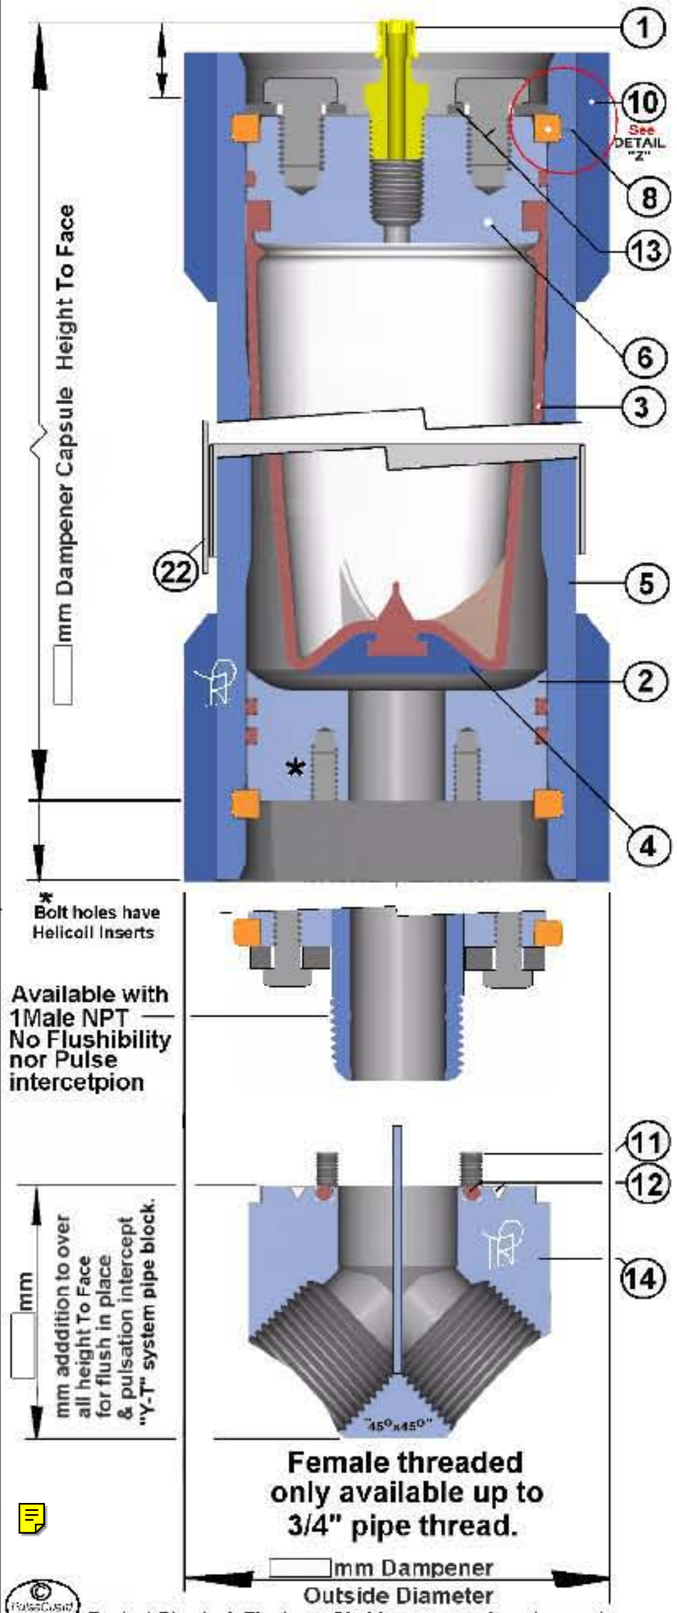

A full Spares Kit Consists of :
Pt Nbr. SK/B..... y..... *...

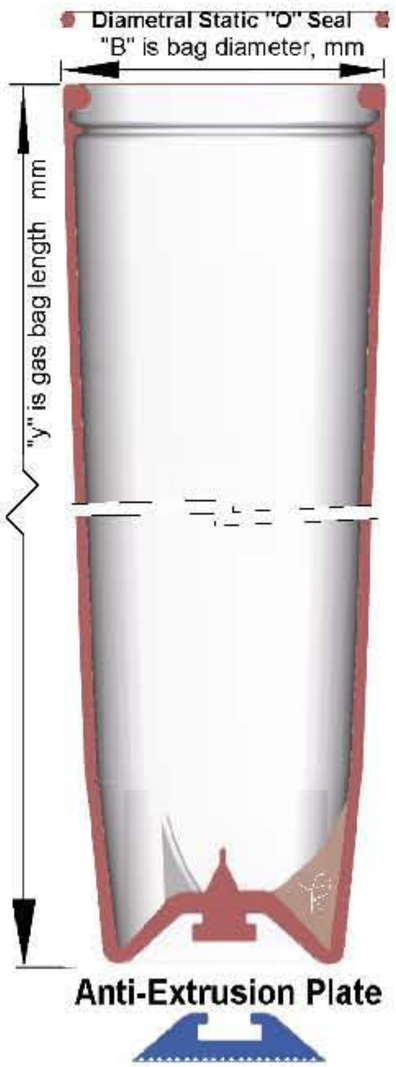

TV 400 Pre-Fill Valve With Pin Core 6055

* Enter Letters Denoting Elastomer Typer Required
E = EPT/EPDM
N=Nitrile
H=Hypalon
B=Butyl
V=Fluoro Elastomer
etc.

NOTE: "O" Ring cross sections
For units with Plastic Bodies
Shore "A" IRH 60
3/32"Nom. 20mm ID to 26mm ID
1/8" Nom. 44mm ID to 65mm ID
1/4" " 70mm ID to220mm ID
3/8" " 221mm ID to310mm ID
Reserved for Jol-PLAS Sug-PLAS
1/2" " mm ID to mm ID

Static Diametral Seal Grooves:
Groove depth 70% actual section
Groove width 1.5 x actual section

Face "O" Seals Shore "A" IRH 70
Up to 25mm flow hole 3/32" section
Over 25mm 1/8" (0.139" 3.5mm)

PED CONFORMITY
DECLARATION as required by the PED ESSENTIAL SAFETY REQUIREMENTS "ESRs" state at 2 Design, under 2.1 the use of "SAFETY COEFFICIENTS". As Euro Norm 6500, and harmonised pressure vesel code 13445 do not have proven safety coefficients to apply, NO ONE complies with ESRs.
Above statement applies to us also.
Any documents of conformity issued particularly to ISO 9001-2000 holders by "Notified Bodies", must be a fraud.
ALL Dampers are NON-CONFORMING

Exageration for Illustration of Fail Safe method.

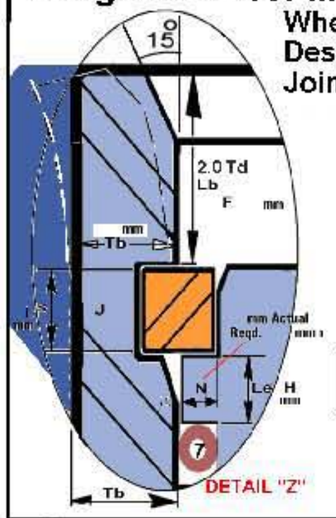

Where Allowable Working Stress = S
Design Pressure P = MAWP + 10% + 15%
Joint Efficiency = E RV RV Acc
We can not accept end user statement that design pressure is working presure

$$Td = \frac{\text{Design Pressure} \times \text{Radius Internal}}{S \times (\text{From Creep Test and to desiruction 2000 Lbs In}^2) E - (0.6P)}$$



Fail Safe N_2 escape by diametral seal extrusion for Store Energy Release.

		IDENTIFICATION / TRACEABILITY
22	Stainless Data Plate on stainless banding.	
14	"PB 45°x45°" machined from PVC Bar.	
13	Retaining Plate & Retaining bolts	
12	Face "O" seal with escape groove	
11	Socket Head Cap Screws, 4 Places. Diam. Lgth UH	
10	PVC Sleve Glued, Pipe Mouth Re-inforcement	
9	Liquid End Plug PVC, Face sealing.	
8	Lock Ring, tamper-proof, 3 segments of circle.	
7	"head plug" - static diametral seal "O" ring	
6	End Closure / "head plug" - Gas End Plug	
5	Seamless Body PVC Pipe.	
4	Anti Extrusion Plate PVC .	
3	Gas Bag "B--- y---" (mm Dia x mm high)	
2	Liquid End Plug PVC & helicoil thread inserts *	
1	Nitrogen Pre-Fill Valve	

Item Nbr	Description / function ▲ BILL OF MATERIALS ▲	Internal "Heat/Cast No" PURCHASE No

Scale : *Please do not print without "MAINTAIN ASPECT RATIO" on, Use A3 paper on A3 paper. Landscape 420mm wide*
Part Nbr. / Drawing Ref : Date th 200_ Rev Nbr 1
Pig - Plas PVC /__i/__p/B__y__/"O"/PVC + PB __"x__"FNPT-PVC

PulseGuard **"Y-T" block, best flanging to system. In place of System "T", better flushing, & intercepts Pressure wave pulsation. Plain end, for glue only.**

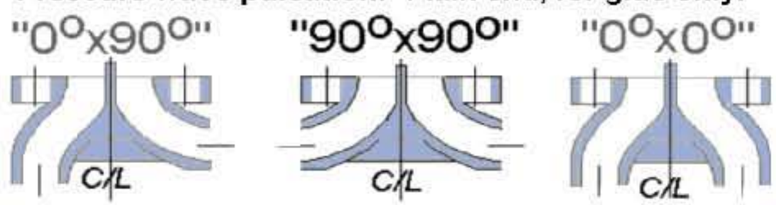

Called - Weld connection angles to this system fitting C/L

PulseGuard "Top-Hat"
Allows flushing of pipe "crud" and pipe hydro-test before damper bolt on. May also replace damper during service.

PulseGuard http://www.PulseGuard.com
http://www.PulseGuard.co.uk
PulseGuard für Deutschland www.pulsationdaempfer.com
PulseGuard, de langue Francaise amortisseurs-de-pulsations.com
PulseGuard, en Espanol / sud Amerique amortiguador-de-pulsaciones.com
PulseGuard, dlya Russkogovoryaschih pulsations-dampfer.com

PulseGuard is the USA registered trade mark of Pulseguard Inc.
PulseGuard is the UK registered trade mark of Pulseguard Ltd.

UK --44(0)161-480-9625 USA ---1910-270-2737